


BVM CASING SLIPS

BVM Casing Slips type "CMSXL" are designed to handle casing from 5 1/2" through 36" OD and are available in 3" or 4" taper. These slips are light-weight, self-centering and made with a web type construction for support where it's needed. Slips are made from alloy steel, heat treated and magnetic particle tested for maximum durability. All steel specifications are certified. The grip length of buttons is 13.5" for all sizes. Flexible handles are standard.

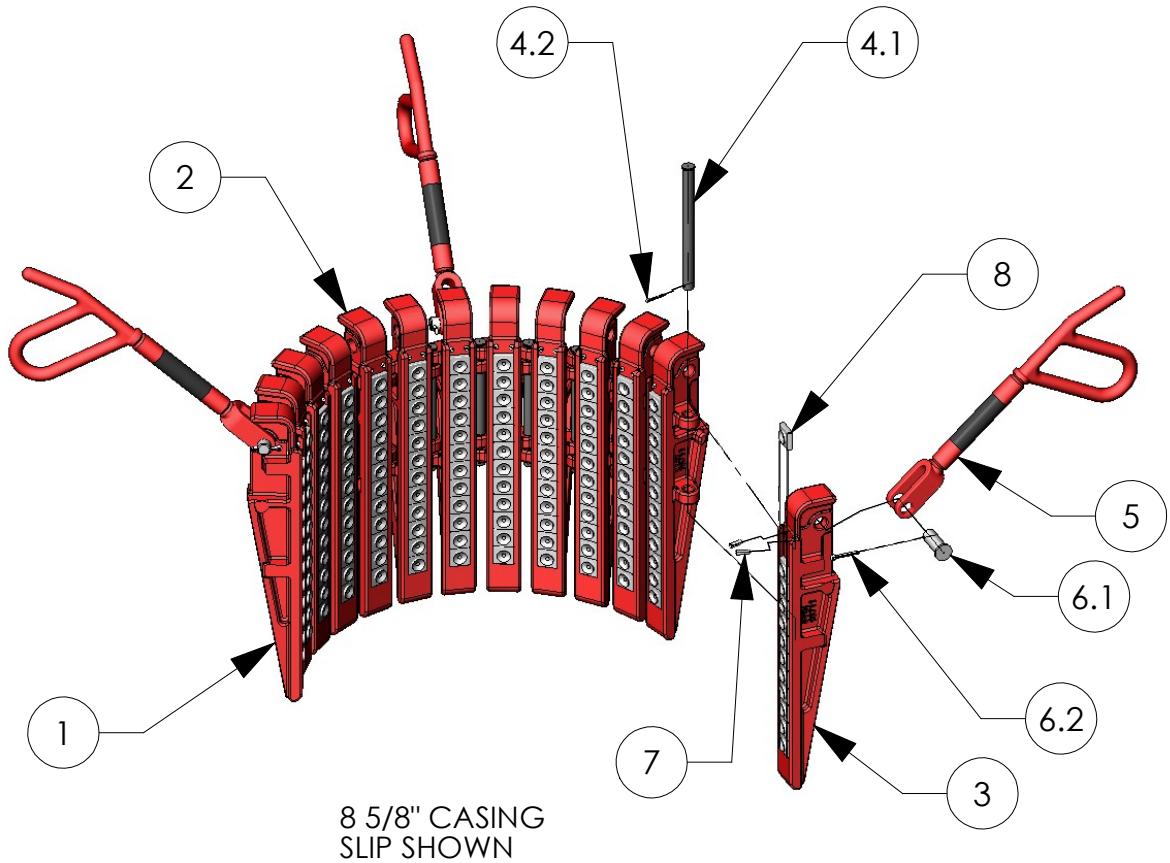

ITEM NO.	PART NO. for 4" Taper	PART NO. for 3" Taper	DESCRIPTION	WEIGHT (lbs)
1	98710	98510	LEFT HAND SEGMENT	13.4
2	98711	98511	INTERMEDIATE SEGMENT	13.7
3	98712	98512	RIGHT HAND SEGMENT	13.4
4	98715	98715	HINGE PIN w/COTTER PIN	--
4.1	98715-1	98715-1	HINGE PIN	0.7
4.2	30020-08-0	30020-08-0	COTTER PIN	0.1
5	98714-FLEX	98714-FLEX	FLEXIBLE HANDLE	3.5
6	98717	98717	HANDLE PIN w/COTTER PIN	--
6.1	98717-1	98717-1	HANDLE PIN	0.3
6.2	30030-10-0	30030-10-0	COTTER PIN	0.1
7	40040-06-0	40040-06-0	ROLL PIN	0.1
8	*	*	CIRCULAR BUTTON	--

* = See next page for Circular Button P/N's

BVM CORPORATION
 430 S. NAVAJO STREET, DENVER CO 80223
 PHONE: 303-975-1402; FAX: 303-975-0981
 www.bvmcorp.com; sales@bvmcorp.com

BVM CASING SLIPS

3" TAPER - CMSXL CASING SLIPS							
SIZE (in)	PART NUMBER (COMPLETE)	TOTAL # OF SEGMENTS	CIRCULAR BUTTON PN.	TOTAL # OF BUTTONS	RATING (TONS)	WEIGHT (lbs)	HANDLE QTY.
9 5/8	98505-FH	13	2630	130	195	226	4
10 3/4	98506-FH	15	2630	150	225	239	
11 3/4	98507-FH	17	2627	170	255	265	
13 3/8	98508-FH	18	2630	180	270	278	
16	98509-FH	21	2631	210	315	317	
18 5/8	98519-FH	25	2626	250	375	369	
20	98520-FH	26	2631	260	390	382	
22	98521-FH	28	13868	280	420	411	
24	98522-FH	30	2631	300	450	443	
26	98523-FH	33	2631	330	495	486	
30	98524-FH	37	2631	370	500	536	
36	98525-FH	44	2631	440	500	637	

4" TAPER - CMSXL CASING SLIPS							
SIZE (in)	PART NUMBER (COMPLETE)	TOTAL # OF SEGMENTS	CIRCULAR BUTTON PN.	TOTAL # OF BUTTONS	RATING (TONS)	WEIGHT (lbs)	HANDLE QTY.
5 1/2	98700-FH	11	2619	132	165	174	3
6 5/8	98701-FH	12	2628	144	180	200	
7	98702-FH	12	2619	144	180	200	
7 5/8 - 8	98703-FH	12	2630	144	180	200	
8 5/8	98704-FH	13	2630	156	195	213	
9 5/8 - 10	98705-FH	14	2630	168	210	226	4
10 3/4	98706-FH	15	2630	180	225	239	
11 3/4	98707-FH	17	2627	204	255	265	
13 3/8	98708-FH	18	2630	216	270	278	
14	98727-FH	18	2630	216	270	349	
16	98709-FH	21	2630	252	315	317	
18 5/8	98719-FH	25	2626	300	375	369	
20	98720-FH	26	2631	312	390	382	
22	98721-FH	28	2631	336	420	411	
24	98722-FH	30	2631	360	450	443	
24 1/2	98728-FH	31	2631	372	465	590	
26	98723-FH	33	2631	396	495	486	
28	98726-FH	35	2631	420	500	664	
30	98724-FH	37	2631	444	500	536	
36	98725-FH	44	2631	528	500	637	

NOTE: 5 1/2", 14", 24.5" & 28" Slip Segments are not interchangeable with type "CMSXL" Slips.

"CP" TYPE CONDUCTOR PIPE SLIPS							
SIZE (in)	PART NUMBER (COMPLETE)	TOTAL # OF SEGMENTS	TOTAL # OF HINGE SPACER	HINGE SPACER PN.	RATING (TONS)	WEIGHT (lbs)	BUTTON PN.
24	99725-FH	13	12	99800	195	276	2631
26	99726-FH	14	13	99800	210	296	2631
30	99727-FH	16	15	99800	240	319	2631

NOTE: Conductor slips furnished with 4 handles. All parts are interchangeable with type "CXL" Casing slips EXCEPT Hinge Spacer P/N 99800